

Create a Part Number

Specifications:

Height: 7.82" (198.6 mm)

Width: 3.83" (97.3 mm) at bracket;
6.14 (155.9 mm) at fuel ports;
8.30 (210.7 mm) at fuel ports with
straight fittings

Depth: 4.09" (103.9 mm)

Ports: 3/8" (9.5 mm) per SAE J2044

Fittings: 3/8" (9.5 mm) Straight quick connect
per SAE J2044 - additional fittings
available - See parts chart on back

Service Clearance: 2.50" (63.5 mm)

Rated Pressure: 50 psi (3.5 bar)

Water Sump Capacity: 3.4 oz (100 ml)


Fuel Type: Diesel (up to B20) or
Gasoline (up to E10)

Flow Rate: Up to 40 gph (gasoline/2 micron)


| Filter Type | Filter/Bracket/Fittings Replacement Filter/ Priming Tube | Color | Black Body | White Body | Bowl Type | Drain | Closed Bowl/No Drain | Micron | 2 micron | 10 micron | 30 micron |
|-------------|--|-------|------------|------------|-----------|-------|----------------------|--------|----------|-----------|-----------|
| | | | | | | | | | | | |
| 23 | | | 1 | | 06 | | | -02 | -10 | -30 | |
| 23 | | | | 2 | 99 | 81 | | -02 | -10 | -30 | |
| | R23 | | 1 | | 07 | | | -02 | -10 | -30 | |
| | R23 | | | 2 | 98 | 80 | | -02 | -10 | -30 | |



Mounting Information:

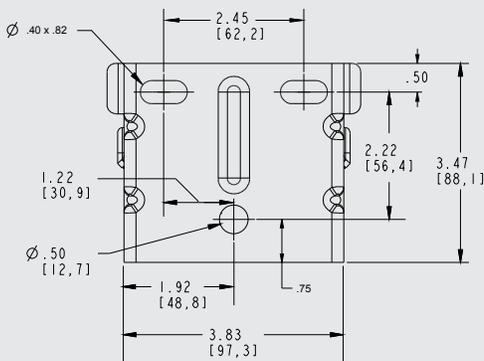


Dimensions:

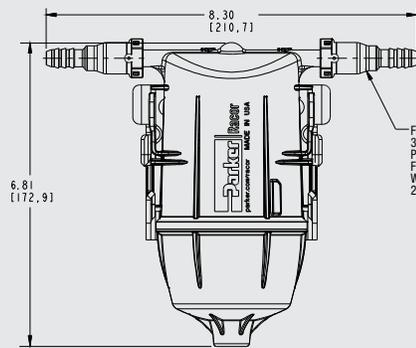


Closed Bowl Assembly

FUEL CONNECTIONS:
3/8 QUICK CONNECT
PER SAE J2044
FITTINGS INCLUDED
WITH 23106, 23281 AND
23299 ASSEMBLIES

TURN TO LEFT TO OPEN DRAIN
DRAIN MOVES UP TO OPEN
DRAIN MOVES DOWN TO CLOSE

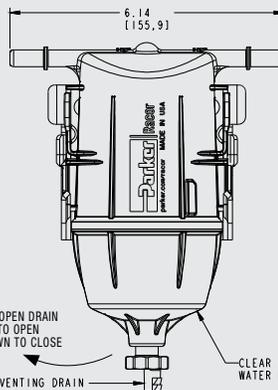

SELF VENTING DRAIN CLEAR BOWL FOR WATER LEVEL VISUAL

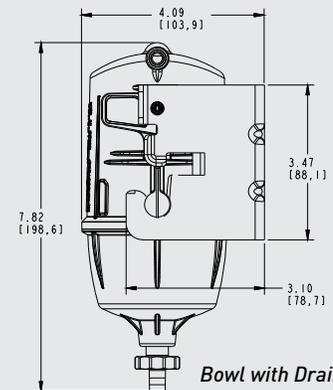

Bowl with Drain

| ASSEMBLY | DESCRIPTION |
|-----------|---|
| 23106-02 | Black Body/Coated Steel Bracket/Bowl Drain/(2) 3/8" Straight Quick Connect Fittings - 2 micron |
| 23106-10 | Black Body/Coated Steel Bracket/Bowl Drain/(2) 3/8" Straight Quick Connect Fittings - 10 micron |
| 23106-30 | Black Body/Coated Steel Bracket/Bowl Drain/(2) 3/8" Straight Quick Connect Fittings - 30 micron |
| 23299-02 | White Body/Stainless Steel Bracket/Bowl Drain/(2) 3/8" Straight Quick Connect Fittings - 2 micron |
| 23299-10 | White Body/Stainless Steel Bracket/Bowl Drain/(2) 3/8" Straight Quick Connect Fittings - 10 micron |
| 23299-30 | White Body/Stainless Steel Bracket/Bowl Drain/(2) 3/8" Straight Quick Connect Fittings - 30 micron |
| 23281-02 | White Body/Stainless Steel Bracket/Closed Bowl/(2) 3/8" Straight Quick Connect Fittings - 2 micron |
| 23281-10 | White Body/Stainless Steel Bracket/Closed Bowl/(2) 3/8" Straight Quick Connect Fittings - 10 micron |
| 23281-30 | White Body/Stainless Steel Bracket/Closed Bowl/(2) 3/8" Straight Quick Connect Fittings - 30 micron |
| R23107-02 | Replacement Filter - Black Body/Priming Tube - 2 micron |
| R23107-10 | Replacement Filter - Black Body/Priming Tube - 10 micron |
| R23107-30 | Replacement Filter - Black Body/Priming Tube - 30 micron |
| R23298-02 | Replacement Filter - White Body/Priming Tube - 2 micron |
| R23298-10 | Replacement Filter - White Body/Priming Tube - 10 micron |
| R23298-30 | Replacement Filter - White Body/Priming Tube - 30 micron |
| R23280-02 | Replacement Filter - White Body/Closed Bowl/Priming Tube - 2 micron |
| R23280-10 | Replacement Filter - White Body/Closed Bowl/Priming Tube - 10 micron |
| R23280-30 | Replacement Filter - White Body/Closed Bowl/Priming Tube - 30 micron |




WARNING: The products described in this literature can expose you to chemicals including Diisononyl phthalate, Carbon black extract, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

PARTS

SNAPP Series

1

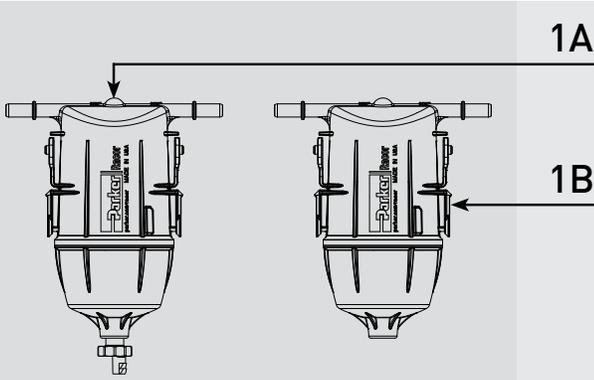


1A

1B

| Part # | Description | |
|--------|---------------------------------|---|
| 1A | See Front - Build a Part Number | SNAPP Fuel Filter with Drain - Available in 23106, 23299, R23107, R23298 Assemblies |
| 1B | See Front - Build a Part Number | SNAPP Fuel Filter Closed Bowl (No Drain) - Available in 23281, R23280 Assemblies |

2

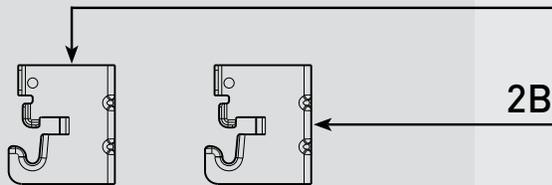

2A

2B

| | | |
|----|-----|--|
| 2A | N/A | SNAPP Bracket - Powder Coated Steel - Included with all 23106 Assemblies |
| 2B | N/A | SNAPP Bracket - Stainless Steel - Included with all 23299 and 23281 Assemblies |

3




3A

3B

| | | |
|----|-----|--|
| 3A | N/A | 3/8" Quick Connect Straight Fitting - (2) Included with all 23106, 23299, and 23281 Assemblies |
| 3B | N/A | 3/8" Priming Tube - Included with all R23107, R23298, and R23280 Assemblies |

4

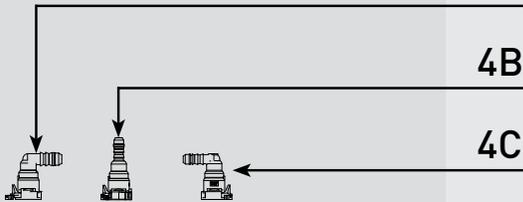

4A

4B


4C

| | | |
|----|---------|---|
| 4A | RK23319 | 3/8" Quick Connect Locking 90° Degree Fitting - 2 Pack |
| 4B | RK23320 | 5/16" Quick Connect Locking Straight Fitting - 2 Pack |
| 4C | RK23321 | 5/16" Quick Connect Locking 90° Degree Fitting - 2 Pack |

Fuel Flow Information:

| ASSEMBLY | With Gasoline | With Diesel |
|-----------|-----------------------------|----------------------------|
| 23106-02 | Max Flow 40 GPH (151.4 LPH) | |
| 23106-10 | Max Flow 34 GPH (128.7 LPH) | |
| 23106-30 | Max Flow 26 GPH (98.4 LPH) | |
| 23299-02 | Max Flow 40 GPH (151.4 LPH) | |
| 23299-10 | Max Flow 34 GPH (128.7 LPH) | |
| 23299-30 | Max Flow 26 GPH (98.4 LPH) | |
| 23281-02 | Max Flow 40 GPH (151.4 LPH) | |
| 23281-10 | Max Flow 34 GPH (128.7 LPH) | |
| 23281-30 | Max Flow 26 GPH (98.4 LPH) | |
| R23107-02 | Max Flow 40 GPH (151.4 LPH) | Max Flow 26 GPH (98.4 LPH) |
| R23107-10 | Max Flow 34 GPH (128.7 LPH) | |
| R23107-30 | Max Flow 26 GPH (98.4 LPH) | |
| R23298-02 | Max Flow 40 GPH (151.4 LPH) | |
| R23298-10 | Max Flow 34 GPH (128.7 LPH) | |
| R23298-30 | Max Flow 26 GPH (98.4 LPH) | |
| R23280-02 | Max Flow 40 GPH (151.4 LPH) | |
| R23280-10 | Max Flow 34 GPH (128.7 LPH) | |
| R23280-30 | Max Flow 26 GPH (98.4 LPH) | |

Service Clearance Required:

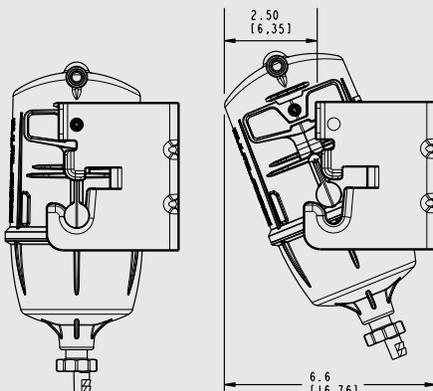

Fuel Capabilities:



Marine Applications:

